

HEYWIRI: Telecomando universale IR WiFi cod. 68.6810.00

Con il **telecomando universale IR WiFi HEYWIRI** controlli la **TV**, il decoder **Sky** ed il **condizionatore**, con lo smartphone e gli assistenti vocali.

Caratteristiche:

- sostituisce i **telecomandi ad infrarossi** di **TV**, decoder **Sky** e **condizionatore**
- consente la gestione da remoto con lo smartphone grazie all'app **HEY Smart**, disponibile per iOS e Android.
- compatibile con gli assistenti vocali di Google Assistant™ ed Alexa per comandare **TV**, **Sky** e **condizionatore**
- compatibile con **IFTTT** per realizzare integrazioni avanzate
- Le dimensioni sono compatte: Diam. 64mm, Altezza 20mm

Controllo Vocale

Remoto

Condividi

Timer

Controllo App




Nella confezione, oltre al **telecomando universale HEYWIRI**, troviamo un cavetto micro-USB e la guida in Italiano e Inglese:

Osservandolo da vicino è possibile notare:

- LED di stato di colore blu
- presa di alimentazione micro-USB
- pulsante di reset sottostante

I possibili stati del LED sono i seguenti:

- sempre acceso: non connesso alla rete
- lampeggio veloce: fase di accoppiamento
- spento: connesso alla rete
- lampeggio singolo: trasmissione dati

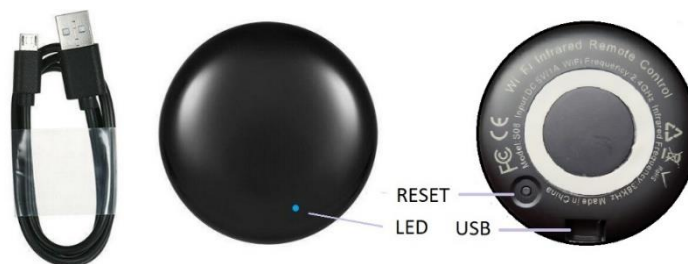

Ricordate sempre che HEYWIRI deve essere posizionato in modo che possa “vedere” il dispositivo da comandare in quanto la trasmissione dei comandi avviene mediante infrarossi.


Il primo passo per la configurazione e' installare sullo smartphone l'app **HEYSMART**, disponibile per Android e iOS. L'app e' compatibile con tutta la gamma di dispositivi intelligenti HEYSMART.



A-- Registrare un Account:

Selezionare (+39 Italia), immettere la mail e proseguire con le indicazioni fornite dell'app per finalizzare la registrazione dell'account. Alla fine della registrazione, è possibile accedere all'app immettendo le proprie credenziali (mail/password).

- 1- Selezionare Email come tipologia di registrazione account e selezionare (+39 Italia).
- 2- Inserire la vostra email
- 3- Selezionare **Otteni Codice di Verifica**. Verrà inviato un codice di 6 cifre via email
- 4- Inserire il codice ricevuto via email
- 5- Impostare una password per il vostro Account
- 6- Selezionare **Fine**

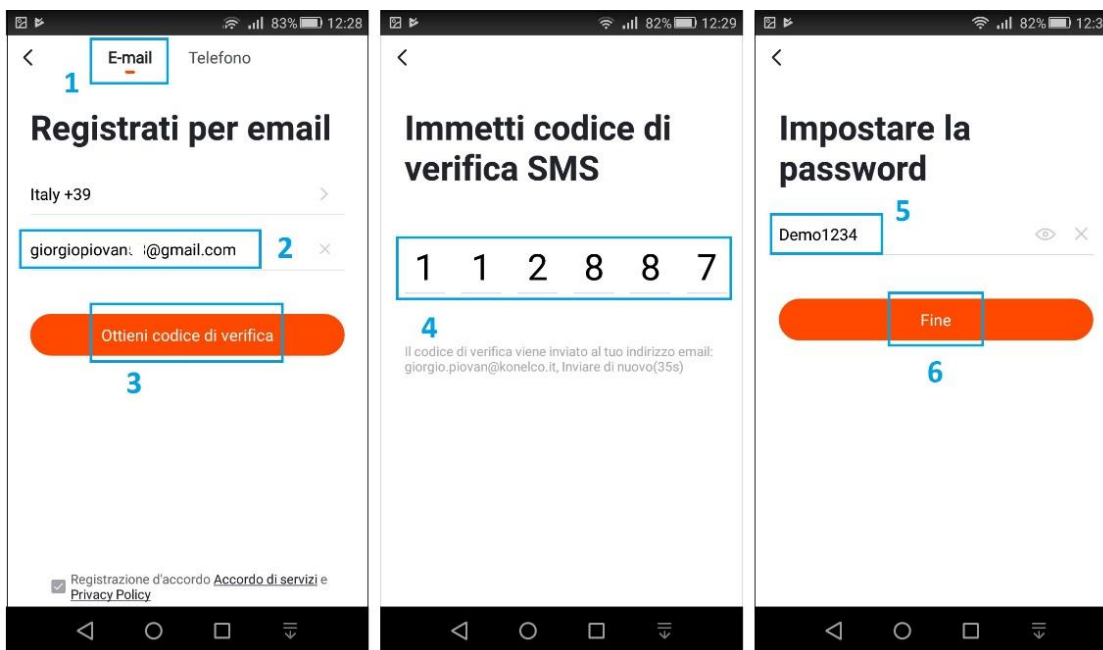

Ora si può proseguire con l'aggiunta del dispositivo HEYWIRI. L'operazione può essere eseguita in due modi: in modalità Wifi Diretta (Smart) oppure in modalità AP.


B-- Aggiungere il dispositivo all'Account in modalità Wifi Diretta (LED lampeggia velocemente)

Prima di procedere con la configurazioni, verificare quanto segue:

- Identificare l'access point WiFi a cui HEYWIRI dovrà essere connesso
- Verificare che sia attiva la banda 2,4 GHz (la banda 5 GHz non è supportata)
- Assicurare che lo smartphone da cui effettuate la procedura di associazione sia collegato allo stesso router WiFi
- Verificare il nome e la password WiFi contengano solamente lettere a-z (A-Z) e numeri 0-9
- Verificare che la password WiFi non superi i 32 caratteri di lunghezza

Nel caso in cui il vostro router WiFi sia dual band (ovvero che supporti contemporaneamente le bande 2,4 e 5 GHz) dovete temporaneamente configurarlo per i soli 2,4 GHz per evitare possibili errori.

- alimentare HEYWIRI con un comune caricatore per smartphone a 5VDC/1A
- Se il LED Blu fosse acceso fisso o stesse lampeggiando lentamente, (1 blink ogni 2:3 secondi) premere per 5:6 secondi il pulsante di reset e rilasciare. Il LED blu a bordo inizierà a lampeggiare velocemente (1 blink al secondo).




Per aggiungere il dispositivo all'App, eseguire la sequenza illustrata:

- 1- Selezionare “+” nella prima schermata dell'app
- 2- Selezionare “Gateway e Altri > IR Smart”
- 3- Verificare che sia presente il router al quale si è connessi. Inserire la password Wifi. La password non deve contenere caratteri speciali. Confermare per proseguire.
- 4- Se l'indicatore del lampeggia velocemente, confermare per proseguire. In caso contrario, premere per 5:6 secondi il pulsante di reset.
- 5- Attendere.. Connessione in corso; la procedura può durare da 10 a 120 sec. in funzione dell'intensità del segnale Wifi.
- 6- Effettuata la connessione, il modulo apparirà sull'App. L'indicatore luminoso del modulo sarà acceso fisso. Confermare selezionando “Fine”.
- 7- HEYWIRI è stato aggiunto all'App associato all'utente.



C-- Aggiungere il dispositivo all'Account in modalità AP (LED lampeggia lentamente)

- Alimentare HEYWIRI con un comune caricatore per smartphone a 5VDC/1A
- Se il LED Blu fosse acceso fisso o stesse lampeggiando velocemente, (1 blink al secondo) premere per 5:6 secondi il pulsante di reset e rilasciare. Il LED blu a bordo inizierà a lampeggiare lentamente (1 blink ogni 2:3 secondi). Modalità AP attivata.



Per aggiungere il dispositivo all'App, eseguire la sequenza illustrata:

- 1- Selezionare “+” nella prima schermata dell'app
- 2- Selezionare “Gateway e Altri > IR Smart”
- 3- Selezionare “Altrimenti”
- 4- Selezionare “Modalità dell'app”
- 5- Confermare che il LED lampeggi Lentamente
- 6- Verificare che sia presente il router al quale si è connessi. Inserire la password Wifi. La password non deve contenere caratteri speciali. Confermare per proseguire.
- 7- Selezionare “Connettere Ora” per passare alle impostazioni Wifi del telefono, per selezionare lo spot wifi emesso da HEYWIRI denominato “SmartLife”
- 8- Selezionare lo spot wifi emesso da HEYWIRI denominato “SmartLife” e tornare all'app.
- 9- Attendere.. Connessione in corso; la procedura può durare da 10 a 120 sec. in funzione dell'intensità del segnale Wifi.
- 10- Effettuata la connessione, il modulo apparirà sull'App. L'indicatore luminoso del modulo sarà acceso fisso. Confermare selezionando “Fine”.
- 11- HEYWIRI è stato aggiunto all'App e associato all'utente.






Aggiungere un telecomando: Clonazione telecomando TV

Una volta completata la configurazione iniziale, l'operazione di clonazione di un telecomando ad infrarossi e' davvero semplice e consiste in una procedura guidata che, nella maggior parte dei casi, non richiederà nemmeno di premere un pulsante:

- 1- Selezionare "+" nella prima schermata dell'app
- 2- Selezionare "TV"
- 3- Selezionare il marchio dell'apparecchio e proseguire

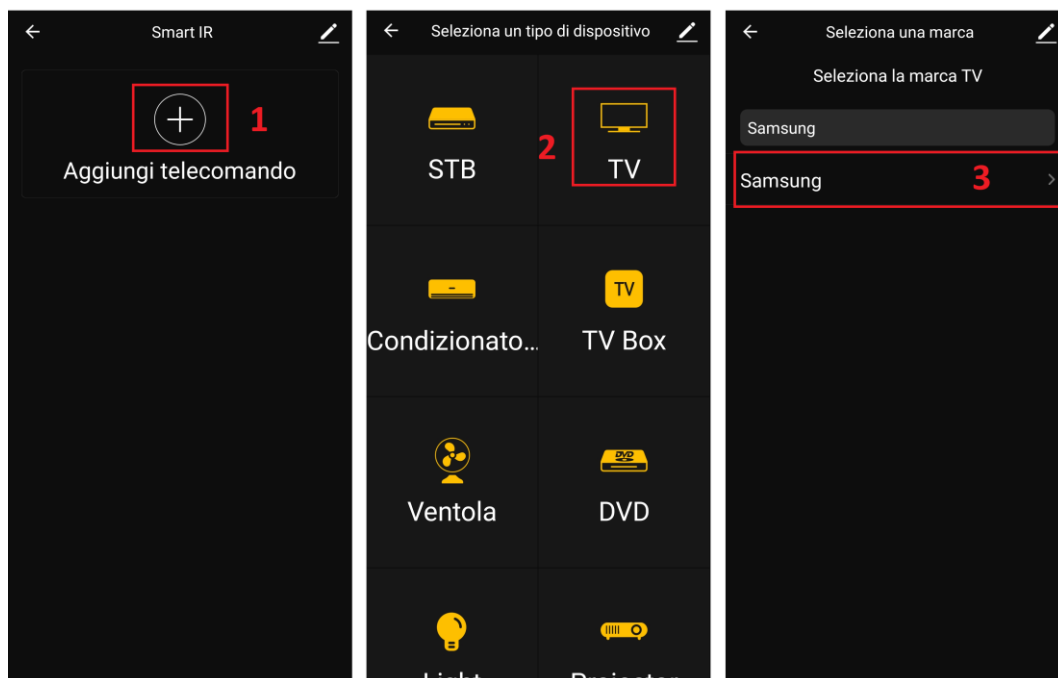


- 4- Verificare che premendo i tasti sull'app e posizionando HEYWIRI davanti al televisore, sia possibile pilotare l'apparecchio. In tal caso, selezionare "Abbinato"
- 5- Qualora fosse necessario aggiungere qualche tasto mancante, selezionare "Modifica"
- 6- Selezionare "Copia pulsante"
- 7- Toccare a lungo l'icona del tasto da copiare sullo smartphone, quindi premere a lungo il tasto del telecomando IR, orientandolo contro HEYWIRI. Alla comparsa del popup, salvare.




Sull'App sono disponibili diverse tipologie di apparecchi pilotati da telecomando IR: decoder satellitare o Sky (STB), televisori (TV), climatizzatori, TV Box, ventilatori, lettori DVD

Nel caso in cui il vostro apparecchio non fosse presente tra quelli predefiniti, potreste registrare i tasti del vostro telecomando scegliendo la modalità **DIY**:

- 1- Selezionare "+" nella prima schermata dell'app
- 2- Selezionare "DIY"
- 3- Selezionare il tipo di dispositivo

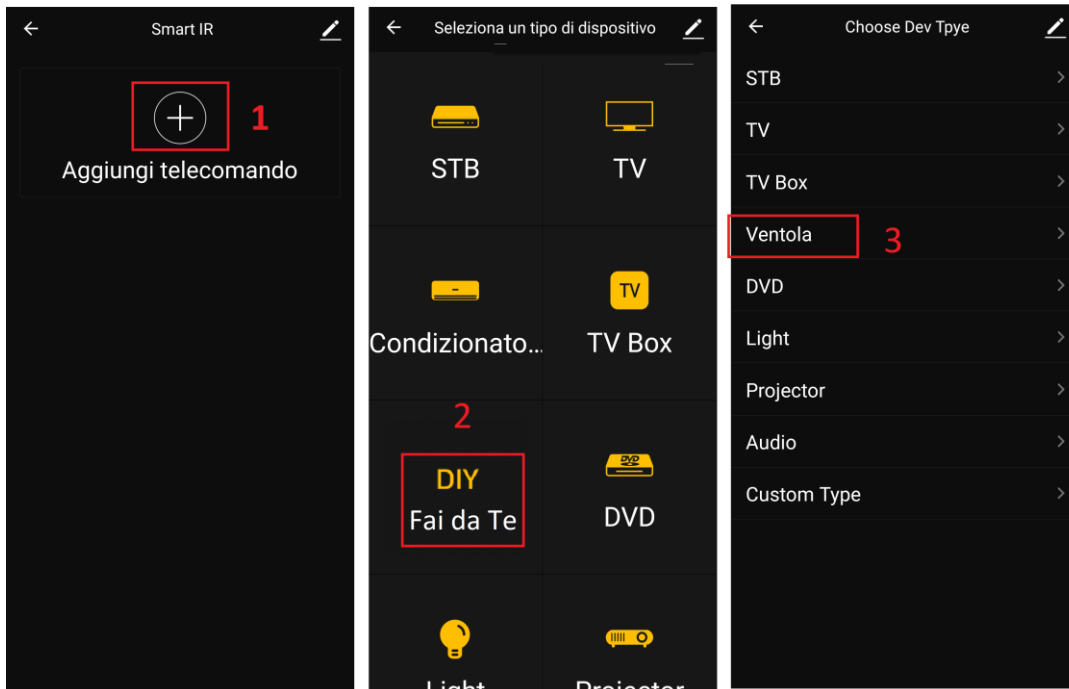

- 4- Selezionare il marchi del prodotto oppure Other
- 5- Toccare a lungo sull'App l'icona del tasto da copiare
- 6- Alla comparsa del messaggio, premere a lungo il tasto sul telecomando IR
- 7- Alla richiesta di conferma, salvare con Done

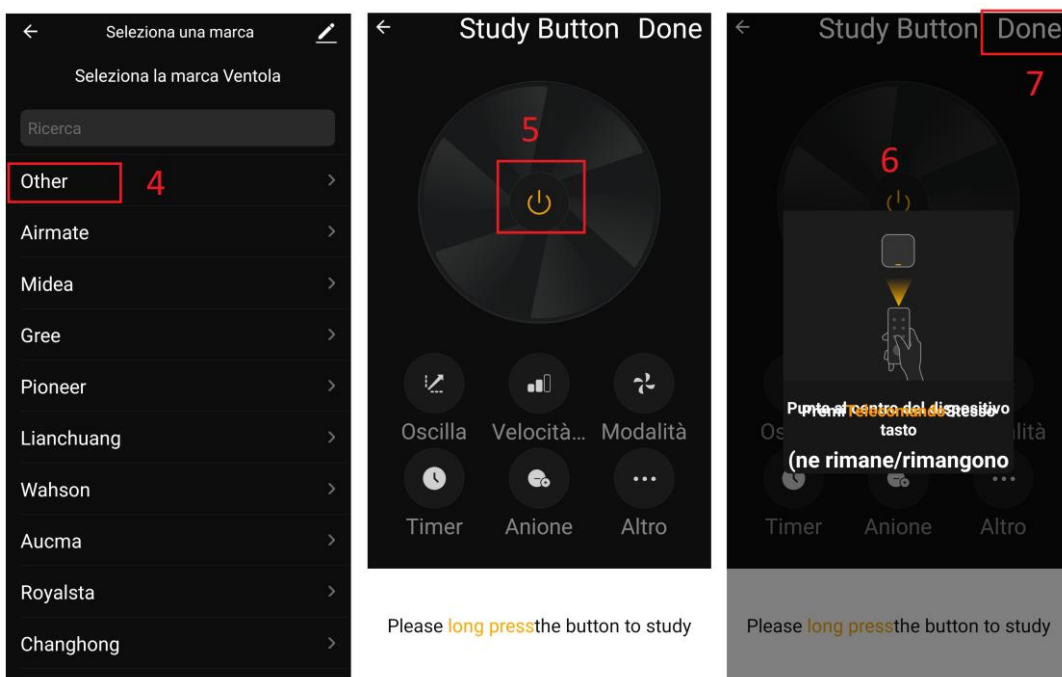

DICHIARAZIONE DI CONFORMITA'

Il fabbricante KON.EL.CO. S.p.A. - P.za Don Mapelli, 75- 20099- Sesto San Giovanni MI- dichiara che il tipo di apparecchiatura radio: **Telecomando IR Wifi, Modello HEYWIRI, Cod.68.6810.00, Marchio ISNATCH**, è conforme alla direttiva 2014/53/UE.

Il testo completo della dichiarazione di conformità UE è disponibile al seguente indirizzo Internet:
www.gbconline.it

Caratteristiche tecniche:

Alimentazione: 5VDC = Micro USB

Frequenza operativa: 2.4 - 2.4835GHz;

Potenza massima RF E.I.R.P: <20 dBm; Versione Software: A0

Made in China



INFORMAZIONE AGLI UTENTI

IT - Il simbolo del cassonetto barrato riportato sulla apparecchiatura indica che il prodotto alla fine della propria vita utile deve essere raccolto separatamente dagli altri rifiuti. L'utente dovrà, pertanto, conferire l'apparecchiatura integra dei componenti essenziali giunta a fine vita agli idonei centri di raccolta differenziata dei rifiuti elettrici ed elettronici, oppure riconsegnarla al rivenditore al momento dell'acquisto di nuova apparecchiatura di tipo equivalente (senza ulteriore acquisto, se di dimensioni inferiori a 25cm). Lo smaltimento abusivo del prodotto da parte dell'utente comporta l'applicazione delle sanzioni amministrative di cui al Decreto Legislativo N. 49 del 14 Marzo 2014.

© 2019 Kon.El.Co all rights reserved.

© 2018 Google LLC All rights reserved;

"Google Assistant", "Google Home" and "Google Play" are trademarks of Google LLC. Amazon, Alexa and all related logos are trademarks of Amazon.com, Inc. or its affiliates. Apple, the Apple logo, and the App Store are trademarks of Apple Inc., registered in the U.S. and other countries and regions.

HeySmart is not created by, affiliated with, or supported by Google Inc.

Kon.El.Co. S.p.A.

Piazza Don Mapelli, 75

20099 Sesto San Giovanni (Mi) – Italy

🇬🇧 HEYWIRI: Universal IR WiFi remote control cod. 68.6810.00

With the HEYWIRI universal WiFi IR remote control, you can control your TV, Sky decoder and air conditioner with your smartphone, Alexa and Google Assistant™.

Features:

- replaces the infrared remote controls of TV, Sky decoder and air conditioner
- allows remote management with your smartphone thanks to the HEY Smart app, available for iOS and Android.
- compatible with the voice assistants of Google Home and Alexa to control TV, Sky and air conditioner
- compatible with IFTTT to create advanced integrations
- The dimensions are compact: Diam. 64mm, Height 20mm




In the package, in addition to the HEYWIRI universal remote control, we find a micro-USB cable and the guide in Italian and English:

By observing it closely it is possible to notice:

- Blue status LED
- micro-USB power socket
- reset button below

The possible states of the LED are as follows:

- always on: not connected to the network
- fast flashing: coupling phase
- off: connected to the network
- single flash: data transmission

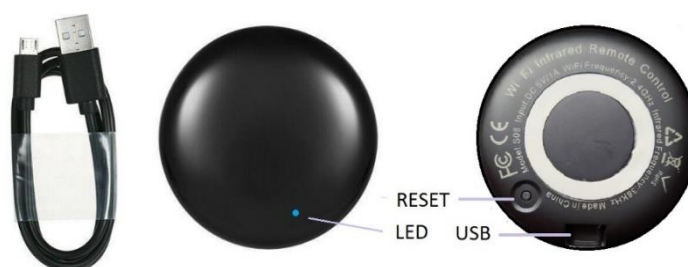

Always remember that HEYWIRI must be positioned so that it can "see" the device to be controlled as the transmission of the commands takes place via infrared.


The first step for configuration is to install the HEYSMART app on your smartphone, available for Android and iOS. The app is compatible with the whole range of HEYSMART smart devices.



A-- Register an Account:

Select (+39 Italy), enter the email and continue with the directions provided by the app to finalize the account registration. At the end of the registration, you can access the app by entering your credentials (email / password).

- 1- Select Email as the type of account registration and select Your country (ex. +39 for Italy).
- 2- Enter your email
- 3- Select Get Verification Code. A 6-digit code will be sent by email
- 4- Enter the code received via email
- 5- Set a password for your Account
- 6- Select Finish

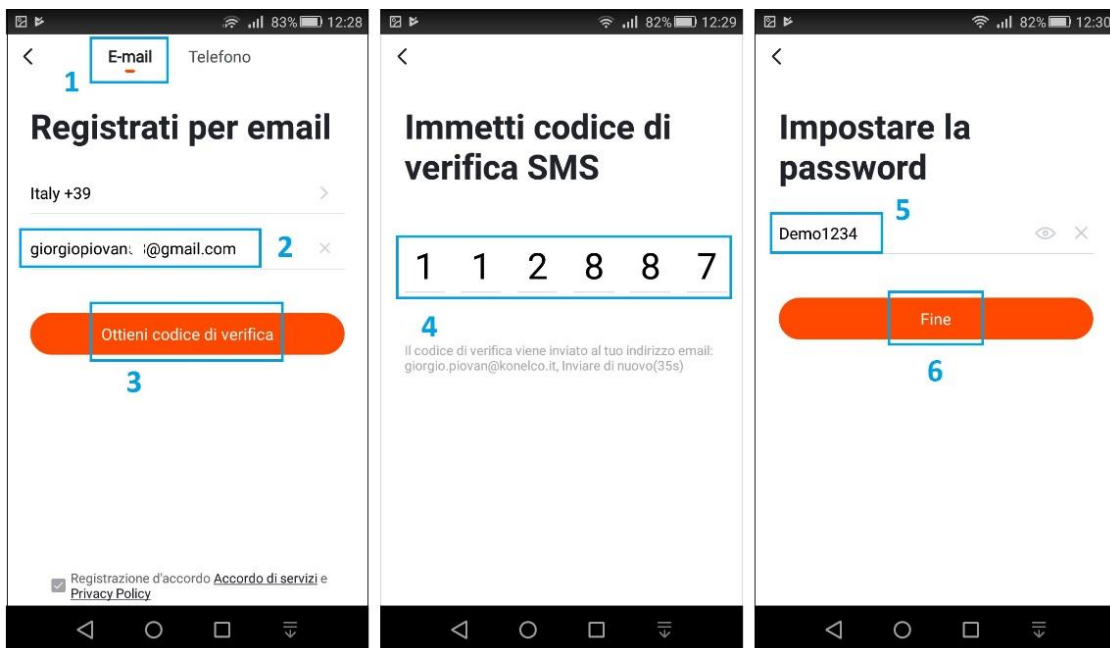

Now you can continue with the addition of the HEYWIRI device. The operation can be performed in two ways: in Direct Wifi (Smart) mode or in AP mode


B-- Add the device to the Account in Direct Wifi mode (LED flashes quickly)

Before proceeding with the configuration, check the following:

- Identify the WiFi access point to which HEYWIRI will be connected
- Verify that the 2.4 GHz band is active (the 5 GHz band is not supported)
- Make sure that the smartphone from which you are pairing is connected to the same WiFi router
- Verify the WiFi name and password contain only letters a-z (A-Z) and numbers 0-9
- Check that the WiFi password does not exceed 32 characters in length





In the event that your WiFi router is dual band (i.e. it supports the 2.4 and 5 GHz bands simultaneously) you must temporarily configure it for only 2.4 GHz to avoid possible errors.

- power HEYWIRI with a common 5VDC / 1A smartphone charger
- If the Blue LED is steady on or flashing slowly, (1 blink every 2: 3 seconds) press the reset button for 5: 6 seconds and release. The blue LED on board will start to flash quickly (1 blink per second).




To add the device to the App, perform the illustrated sequence:

- 1- Select "+" in the first screen of the app
- 2- Select "Gateway and Others> IR Smart"
- 3- Check that the router to which you are connected is present. Enter the Wifi password. The password must not contain special characters. Confirm to continue.
- 4- If the indicator of the flashes quickly, confirm to continue. If not, press the reset button for 5: 6 seconds.
- 5- Wait .. Connection in progress; the procedure can last from 10 to 120 sec. depending on the strength of the Wifi signal.
- 6- Once connected, the module will appear on the App. The module indicator light will be on steady. Confirm by selecting "DONE".
- 7- HEYWIRI has been added to the App associated with the user.

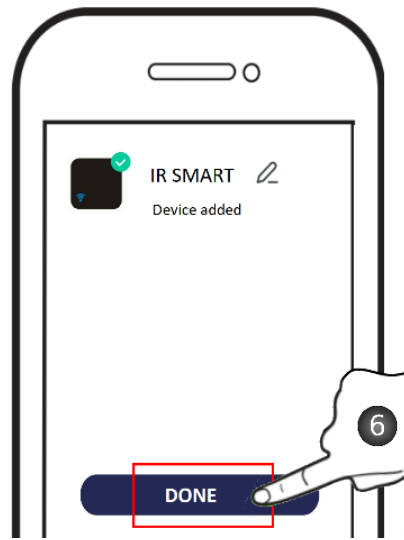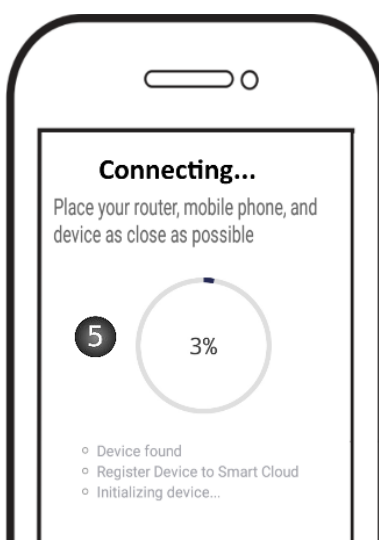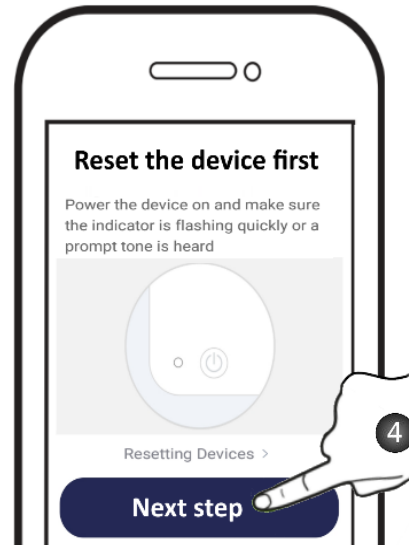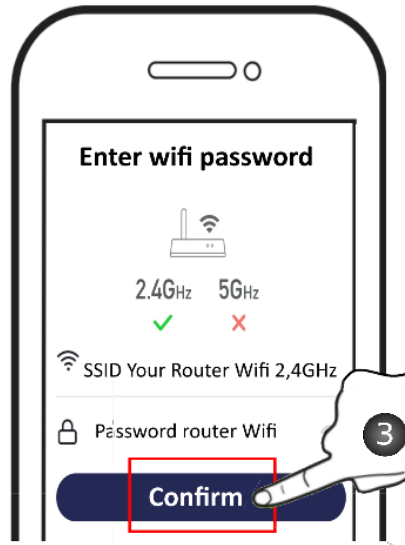


C-- Add the device to the Account in AP mode (LED flashes slowly)




- Power HEYWIRI with a common 5VDC / 1A smartphone charger
- If the Blue LED is steady on or flashing quickly, (1 blink per second), press the reset button for 5: 6 seconds and release. The blue LED on board will start to flash slowly (1 blink every 2: 3 seconds).
- AP mode activated.



To add the device to the App, perform the illustrated sequence:

- 1- Select "+" in the first screen of the app
- 2- Select "Gateway and Others> IR Smart"
- 3- Select "Otherwise"
- 4- Select "App mode"
- 5- Confirm that the LED flashes **slowly**
- 6- Check that the router to which you are connected is present. Enter the Wifi password. The password must not contain special characters. Confirm to continue.
- 7- Select "Connect Now" to go to the phone's Wifi settings, to select the wifi spot emitted by HEYWIRI called "SmartLife"
- 8- Select the wifi spot issued by HEYWIRI called "SmartLife" and return to the app.
- 9- Please wait .. Connection in progress; the procedure can last from 10 to 120 sec. depending on the strength of the Wifi signal.
- 10- Once connected, the module will appear on the App. The module indicator light will be on steady. Confirm by selecting "Finish".
- 11- HEYWIRI has been added to the App and associated with the user.

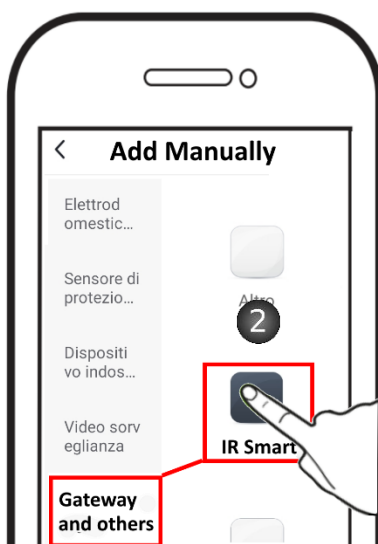


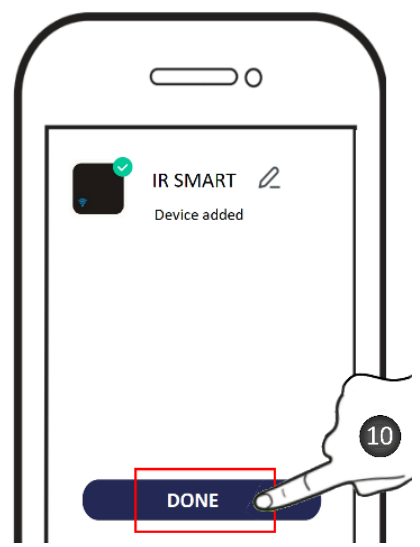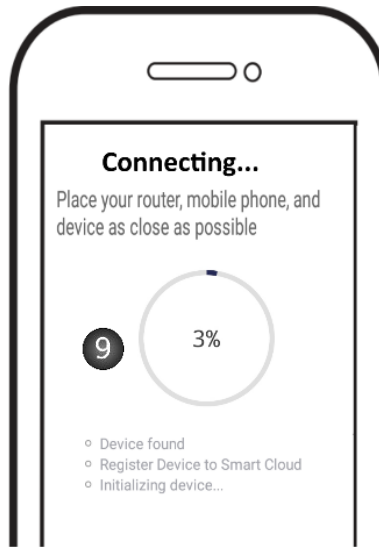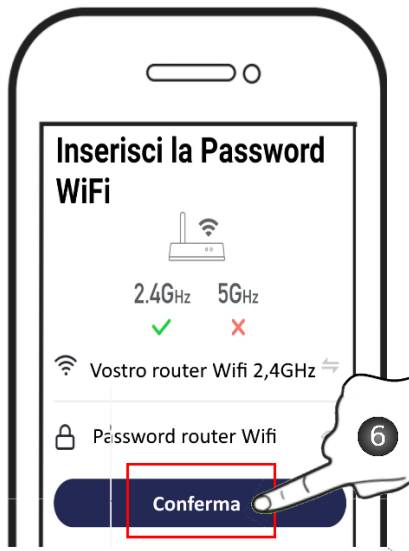

Add a remote control: Clone TV remote control

Once the initial configuration is complete, the cloning operation of an infrared remote control is really simple and consists of a guided procedure that, in most cases, will not even require you to press a button:

- 1- Select "+" in the first screen of the app
- 2- Select "TV"
- 3- Select the device brand and continue

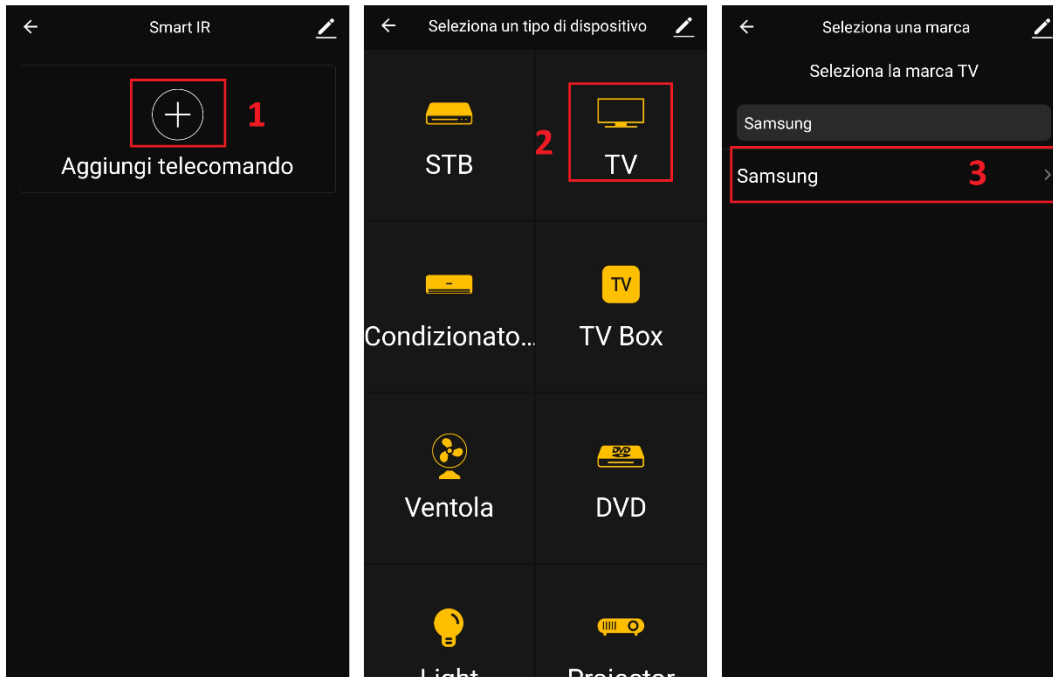


- 4- Check that by pressing the buttons on the app and placing HEYWIRI in front of the TV, you can control the device. In this case, select "Matched"
- 5- If it is necessary to add some missing keys, select "Modify"
- 6- Select "Copy button"
- 7- Long touch the icon of the button to be copied on the smartphone, then long press the button of the IR remote control, pointing it against HEYWIRI. When the popup appears, save.




Different types of devices controlled by IR remote control are available on the App: satellite or Sky decoder (STB), televisions (TV), air conditioners, TV boxes, fans, DVD players

If your appliance is not among the predefined ones, you could register the buttons on your remote control by choosing the DIY mode:

- 1- Select "+" in the first screen of the app
- 2- Select "DIY"
- 3- Select the type of device

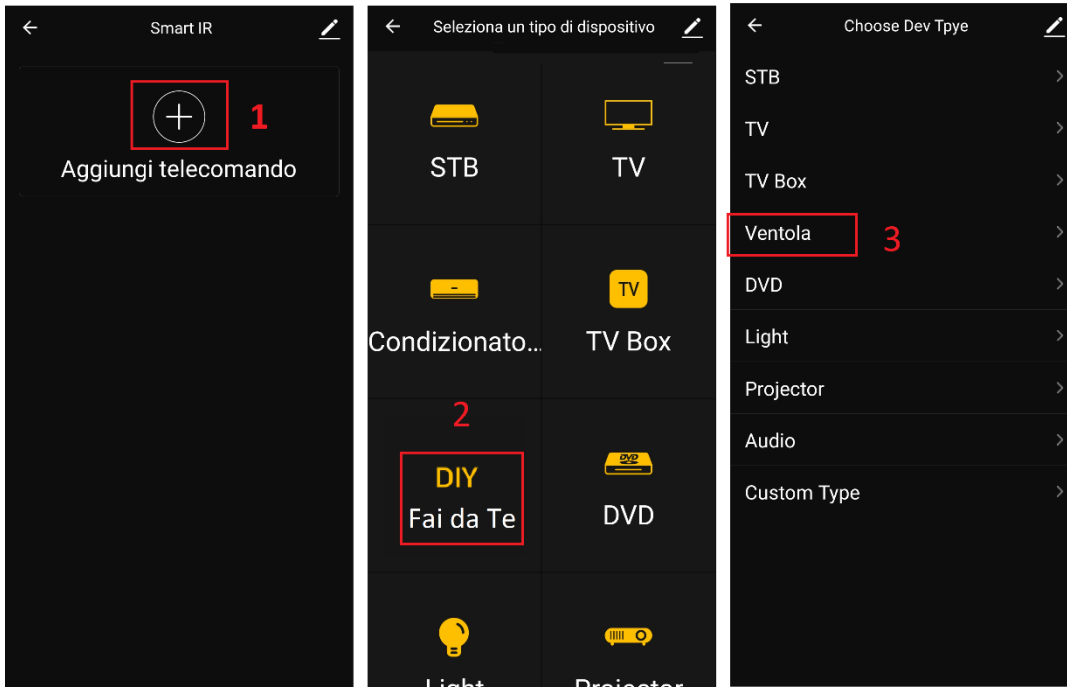

- 4- Select the product brand or Other
- 5- Long touch the icon of the button to be copied on the App
- 6- When the message appears, long press the button on the IR remote control
- 7- At the confirmation request, save with Done

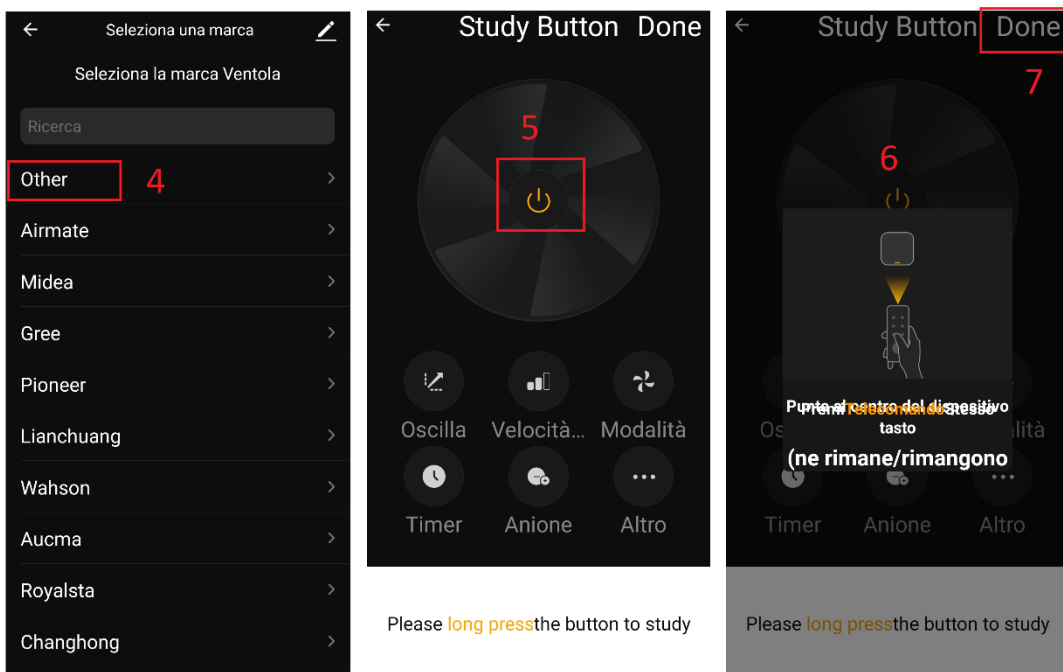

DECLARATION OF CONFORMITY

The manufacturer KON.EL.CO. S.p.A. - P.za Don Mapelli, 75-20099- Sesto San Giovanni MI- declares that the type of radio equipment: **IR Wifi remote control, Model HEYWIRI, Cod. 68.6810.00, ISNATCH** mark, complies with Directive 2014/53 / EU.

The full text of the EU declaration of conformity is available at the following Internet address: www.gbconline.it

Technical features:

Power supply: 5VDC Micro USB

Operating frequency: 2.4 - 2.4835GHz;

Maximum RF power E.I.R.P: <20 dBm; Software version: A0

Made in China



INFORMATION TO USERS

ENG - The symbol of the crossed-out wheeled bin indicated on the appliance indicates that the product at the end of its useful life must be collected separately from other waste. The user must, therefore, supply the complete equipment with essential components that have reached the end of their life to the appropriate separate collection centers for electrical and electronic waste, or return it to the retailer when purchasing new equivalent equipment (without further purchase, if smaller than 25cm). The abusive disposal of the product by the user entails the application of the administrative sanctions pursuant to Legislative Decree No. 49 of 14 March 2014.

© 2019 Kon.El.Co all rights reserved.

© 2018 Google LLC All rights reserved;

“Google Assistant”, “Google Home” and “Google Play” are trademarks of Google LLC. Amazon, Alexa and all related logos are trademarks of Amazon.com, Inc. or its affiliates. Apple, the Apple logo, and the App Store are trademarks of Apple Inc., registered in the U.S. and other countries and regions.

HeySmart is not created by, affiliated with, or supported by Google Inc.

Kon.El.Co. S.p.A.

Piazza Don Mapelli, 75

20099 Sesto San Giovanni (Mi) – Italy

HEYWIRI, Telecomando universale IR WiFi, compatibile con Amazon Alexa e Google Assistant™ - Cod. 68.6810.00

Sostituisce i telecomandi ad infrarossi di TV, decoder Sky e condizionatore, consentendone la gestione da remoto tramite smartphone.



Caratteristiche tecniche

Tipo Dispos.	Modulo Relè Wifi
Alimentazione	5Vdc Micro USB
Frequenza IR	38KHz
Freq. Wifi	2.4 - 2.4835GHz
Temp. Lavoro	0°C - +50°C
Portata IR	8 m
Dimensioni	Diam.64 * 20mm

Avvertenze

- HEYWIRI deve essere posizionato in modo che possa vedere il dispositivo da comandare in quanto la trasmissione dei comandi avviene mediante infrarossi.
- Installare lontano da apparecchiature con forti emissioni di campi elettromagnetici, es. Microonde, che possano alterare l'intensità del segnale Wifi e creare mal

- funzionamenti.
- Evitare di smontare, riparare o modificare il dispositivo.
 - durante la procedura, avvicinare lo smartphone al dispositivo HEYWIRI e accertarsi che l'intensità del segnale Wifi sia almeno al 50%.

- HEYWIRI NON supporta Wifi a 5GHz.
- L'SSID del router e password Wifi NON devono contenere più di 32 caratteri.

1 Scaricare dagli stores Apple e/o Google l'app **HeySmart**




2 Registrare un Account: Selezionare (+39 Italia), immettere la mail e proseguire con le indicazioni fornite dell'app per finalizzare la registrazione dell'account. Alla fine della registrazione, sarà possibile accedere all'app immettendo le proprie credenziali (mail/password).

Prima di associare HEYSWITCH, assicurarsi di connettere il proprio smartphone al router Wi-Fi 2.4GHz.



3 Alimentare HEYWIRI con un qualsiasi alimentatore a 5VDC per smartphone. Porre HEIWIRI in modalità apprendimento, tenendo premuto il tasto ON-OFF per 5 : 6 secondi. L'indicatore luminoso presente sul modulo inizierà a lampeggiare velocemente.



4 Aggiungere il modulo selezionando Gateway e Altri > IR Smart



5 Verificare che lo smartphone sia connesso alla banda wifi 2,4GHz. Inserire la password del vostro router Wifi, NON deve contenere caratteri speciali e NON deve avere più di 32 caratteri.



- 6 Se il LED Blu su HEYWIRI lampeggia velocemente, confermare per proseguire. In caso contrario, eseguire il punto 3.




- 7 Connessione in corso, la procedura può durare da 10 a 120 sec. in funzione dell'intensità del segnale Wifi.



- 8 Effettuata la connessione, il dispositivo apparirà sull'App. L'indicatore luminoso del modulo sarà spento. Confermare per proseguire.



- 9 Connettere il dispositivo ad Amazon Alexa o Google Assistant per il controllo vocale o per condividere il dispositivo con amici e parenti.

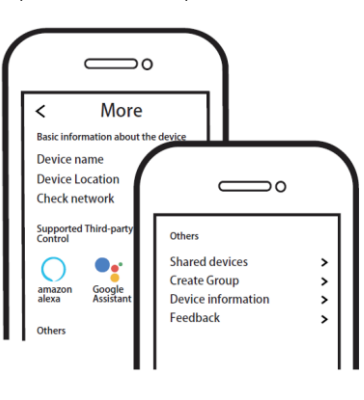

DICHIARAZIONE DI CONFORMITA'
Il fabbricante KON.EL.CO. S.p.A. - P.za Don Mapelli, 75- 20099- Sesto San Giovanni MI dichiara che il tipo di apparecchiatura radio: **Telecomando IR Wifi, Modello HEYWIRI, Cod.68.6810.00, Marchio ISNATCH**, è conforme alla direttiva 2014/53/UE. Il testo completo della dichiarazione di conformità UE

è disponibile al seguente indirizzo Internet: www.gbconline.it

Caratteristiche tecniche:

Alimentazione: 5VDC  **Micro USB**

Frequenza operativa: 2.4 - 2.4835GHz;

Potenza massima RF E.I.R.P: <20 dBm;

Versione Software: 2.1.5

Made in China




INFORMAZIONE AGLI UTENTI
IT - Il simbolo del cassonetto barrato riportato sulla apparecchiatura indica che il prodotto alla fine della propria vita utile deve essere raccolto separatamente dagli altri rifiuti. L'utente dovrà, pertanto, conferire l'apparecchiatura integra dei componenti essenziali giunta a fine vita agli idonei centri di raccolta differenziata dei rifiuti elettrici ed elettronici, oppure riconsegnarla al rivenditore al momento dell'acquisto di nuova apparecchiatura di tipo equivalente (senza ulteriore acquisto, se di dimensioni inferiori a 25cm). Lo smaltimento abusivo del prodotto da parte dell'utente comporta l'applicazione delle sanzioni amministrative di cui al Decreto Legislativo N. 49 del 14 Marzo 2014.

© 2019 Kon.El.Co all rights reserved.
© 2018 Google LLC All rights reserved;

"Google Assistant", "Google Home" and "Google Play" are trademarks of Google LLC. Amazon, Alexa and all related logos are trademarks of Amazon.com, Inc. or its affiliates. Apple, the Apple logo, and the App Store are trademarks of Apple Inc., registered in the U.S. and other countries and regions.

HeySmart is not created by, affiliated with, or supported by Google Inc.

Kon.El.Co. S.p.A.
Piazza Don Mapelli, 75
20099 Sesto San Giovanni (Mi) – Italy

 **Universal IR WiFi remote control, compatible with Amazon Alexa and Google Assistant™ - Cod. 68.6810.00**

It replaces the infrared remote controls of TV, Sky decoder and air conditioner, allowing remote management via smartphone



Technical features

Power supply	5Vdc Micro USB
Range IR	38KHz
Wifi Freq.	2.4 - 2.4835GHz
Temp. of work	0°C - +50°C
Umidity	8 m
Dimensions	Diam.64 * 20mm


- HEYWIRI must be positioned so that it can see the device to be controlled as the transmission of the commands takes place via infrared.
- Install away from equipment with strong emissions of electromagnetic fields, e.g. Microwaves, which can alter the intensity Wifi signal and create malfunctions.
- Avoid disassembling, repairing or modifying the device.
- during the procedure, bring your

smartphone closer to the HEYWIRI device and make sure that the Wifi signal strength is at least 50%.
 - HEYWIRI DOES NOT support 5GHz Wifi.
 - The router's SSID and Wifi password must NOT contain more than 32 characters.



1 Download the HeySmart app from Apple and / or Google stores




2 Register an Account: Select (+39 Italy), enter the email and continue with the instructions provided by the app to finalize the registration of the account. At the end of the registration, it will be possible to access the app by entering your credentials (email / password). Before starting the next step, make sure you have your smartphone connected to the 2.4GHz Wi-Fi router. The password must NOT contain special characters, only letters and numbers.

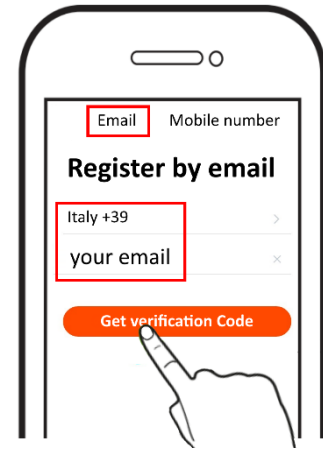


3 Power HEYWIRI with any 5VDC smartphone power supply. Put HEIWIRI in learning mode, keeping the ON-OFF key pressed for 5: 6 seconds. The indicator light on the module will start to flash quickly.

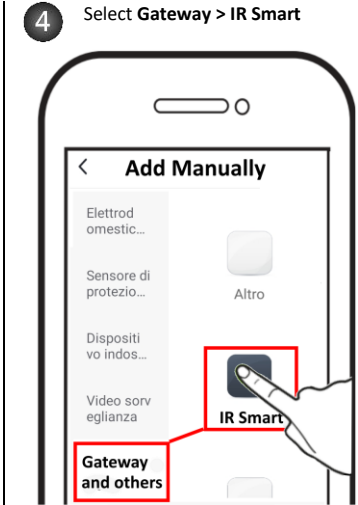


5 Verify that the smartphone is connected to the 2.4GHz wifi band. Enter the password of your Wifi router, it MUST NOT contain special characters

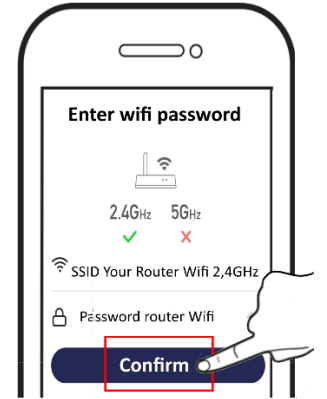


- 6 If the Device has a flashing red LED, confirm to continue. If not, perform step 3.

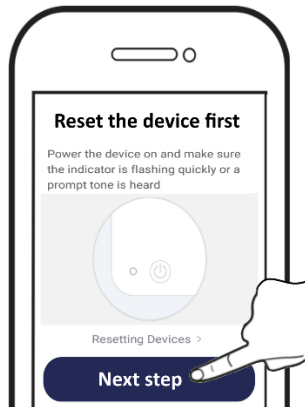

- 7 Connection in progress, the procedure can last from 10 to 120 sec. depending on the strength of the Wifi signal.

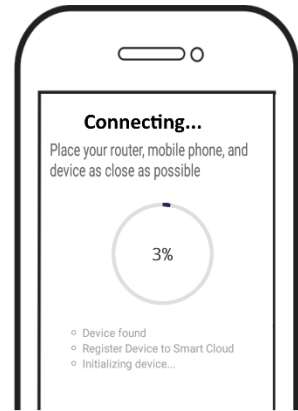

- 8 Once connected, the IR Smart will appear on the App. The module's indicator light will be off. Confirm.

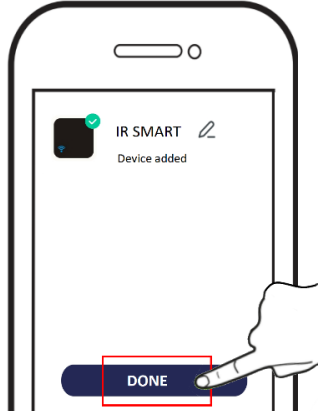

- 9 Connect the device to Amazon Alexa or Google Assistant for voice control or to share the device with friends and family.



DECLARATION OF CONFORMITY
The manufacturer KON.EL.CO. S.p.A. - P.za Don Mapelli, 75-20099 - Sesto San Giovanni MI – Italy, declares that the type of radio equipment: **Remote IR control Wifi, Model HEYWIRI, Cod. 68.6810.00, ISNATCH mark, complies with Directive 2014/53 / EU.** The full text of the EU declaration of conformity is available at the following Internet address: www.gbconline.it

Technical features:

Power supply: 5VDC **Micro USB**
Operating frequency: 2.4 - 2.4835GHz;
Maximum RF E.I.R.P power: <20 dBm Max;
Software Version: 2.1.5

Made in China



INFORMATIONS FOR USER

EN- At the end of its life, the device has to be separated from the other waste. Consign the device and all its components

together to a center of electronical and electrotechnical waste recycling center,

© 2019 Kon.El.Co all rights reserved.

© 2018 Google LLC All rights reserved; "Google Assistant", "Google Home" and "Google Play" are trademarks of Google LLC. Amazon, Alexa and all related logos are trademarks of Amazon.com, Inc. or its affiliates. Apple, the Apple logo, and the App Store are trademarks of Apple Inc., registered in the U.S. and other countries and regions.

HeySmart is not created by, affiliated with, or supported by Google Inc.

Kon.El.Co. S.p.A.
Piazza Don Mapelli, 75
20099 Sesto San Giovanni (Mi) – Italy